




BELT TECHNICAL DATA SHEET

TUFFY — 120BLK SAR

BELT CONSTRUCTION: Single ply solid woven polyester, PVC black top cover, PVC skim low friction underside

Colour	Black
Belt Thickness	3.8mm
Top Cover Thickness	1.2MM
Belt Weight	4.8kg/m ²
Coefficient of friction (On steel)	0.25
Minimum pulley Diameter	75mm (at ambient temperature)
Minimum backflex Diameter	110mm (at ambient temperature)
Belt Factor	12 N/mm at 1%
Temperature Range	-4 to + 80 Deg C
Food Rating	N/A
Carcass construction	Flexible
Stock width	1829mm
Manufactured width	1829mm

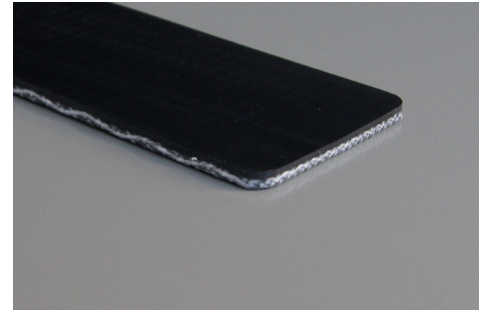

Recommended Splice Finger / skive join
Recommended fastener U2 or 125

Belt Characteristics

- Suitable for troughed conveyors
- Suitable for longitudinal and lateral profiles
- Heavy duty carcass resists puncturing and tearing
- Moderate oil and fat resistance
- Weather, ozone and wear resistant cover
- Unaffected by grease, moisture and humidity

Typical Applications

- Timber industry
- Elevator bucket conveyors
- Fruit, vegetable and agricultural feed applications
- General conveying of unit goods
- Trough conveyors
- Checkout conveyors