




BELT TECHNICAL DATA SHEET

TUFFY — 3/V7/V5/15WDB

BELT CONSTRUCTION: Three ply polyester rigid, PVC White top cover 75 shore A, PVC 90 shore A sealed diamond profile underside

Colour	White
Belt Thickness	4.60mm
Top Cover Thickness	0.7mm
Bottom Cover Thickness	0.5mm
Belt Weight	5.3 kg/m ²
Coefficient of friction (On steel)	0.30
Minimum pulley Diameter	115mm (at ambient temperature)
Minimum back flex Diameter	160mm (at ambient temperature)
Belt Factor	15 N/mm at 1% stretch
Temperature Range	-10 to + 90 Deg C
Food Rating	FDA USDA
Carcass construction	Rigid
Stock width	2000mm
Manufactured width	2000mm

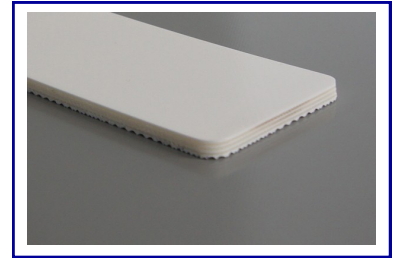

Recommended Splice Lap or finger splice
Recommended fastener U2 or 125

Belt Characteristics Dimensionally stable and laterally rigid
Abrasion resistant and shock absorbing thick top cover
Suitable for longitudinal or lateral profiles
High degree of oil and fat resistance
Weather and ozone resistant
Unaffected by grease, moisture & humidity, sealed underside

Typical Applications Meat, poultry, fish and dairy
Food products, bakery, confectionary and pharmaceutical
Fruit, vegetable and agricultural applications
Metal detector conveyors
Packaging conveyors / box handling
Boning / trim belts